
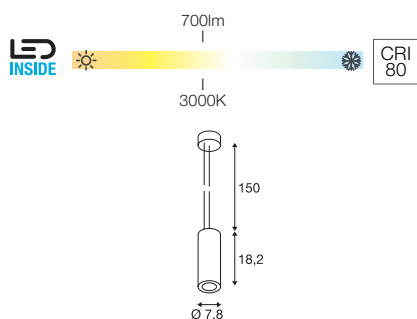
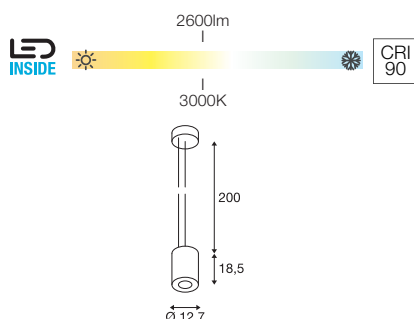
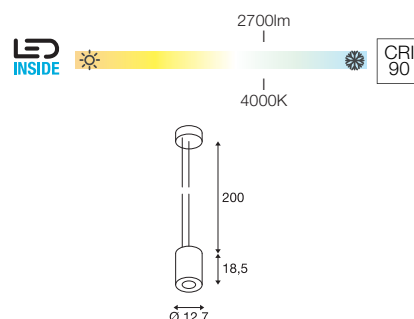


SUPROS 78
PD

220-240V ~50/60Hz | 250mA
Systemleistung: 12W
Material: Aluminium

SUPROS
PD

220-240V ~50/60Hz | 750mA
Systemleistung: 31W
Material: Aluminium

SUPROS
PD

220-240V ~50/60Hz | 750mA
Systemleistung: 31W
Material: Aluminium



Art. Nr.	700lm 3000K	A → G
133120, 133121		A → G E



<input type="checkbox"/> Linse 20°	
Art. Nr. 116302	
<input type="checkbox"/> Linse 40°	
Art. Nr. 116304	

Variante	Art. Nr.
700lm 3000K CRI80	
<input checked="" type="checkbox"/> schwarz	133120
700lm 3000K CRI80	
<input type="checkbox"/> weiß	133121



Art. Nr.	2600lm 3000K	A → G
1003275, 1003276		A → G E



<input checked="" type="checkbox"/> Reflektor 20°	
Art. Nr. 114102	
<input checked="" type="checkbox"/> Reflektor 40°	
Art. Nr. 114104	

Variante	Art. Nr.
2600lm 3000K CRI90	
<input checked="" type="checkbox"/> schwarz	1003275
2600lm 3000K CRI80	
<input type="checkbox"/> weiß	1003276





Art. Nr.	2700lm 3000K	A → G
1003277, 1003278		A → G E



<input checked="" type="checkbox"/> Reflektor 20°	
Art. Nr. 114102	
<input checked="" type="checkbox"/> Reflektor 40°	
Art. Nr. 114104	

Variante	Art. Nr.
2700lm 4000K CRI90	
<input checked="" type="checkbox"/> schwarz	1003277
2700lm 4000K CRI90	
<input type="checkbox"/> weiß	1003278

SUPROS 78 UP/DOWN
WL, PHASE

220-240V ~50/60Hz | 500mA
Systemleistung: 20W
Material: Aluminium



		A → G
Up/Down	700lm 3000K	A G E



☐ Linse 20°

Art. Nr. 116302


☐ Linse 40°

Art. Nr. 116304

Variante	Art. Nr.
Up: 700lm 3000K CRI80 Down: 700lm 3000K CRI80	
■ schwarz	116340
Up: 700lm 3000K CRI80 Down: 700lm 3000K CRI80	
□ weiß	116341



116331 271

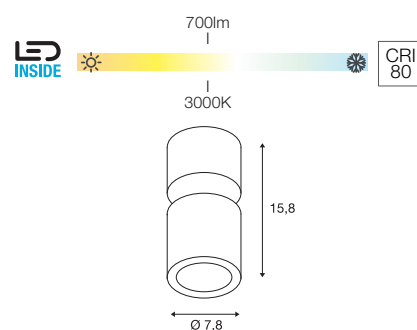SUPROS 78
CL, PHASE

220-240V ~50/60Hz | 250mA
Systemleistung: 12W
Material: Aluminium



		A → G
116330, 116331	700lm 3000K	A G E



☐ Linse 20°

Art. Nr. 116302




☐ Linse 40°

Art. Nr. 116304

Variante	Art. Nr.
700lm 3000K CRI80	
■ schwarz	116330
700lm 3000K CRI80	
□ weiß	116331



SUPROS 78
EL, PHASE

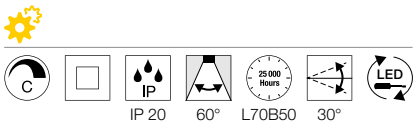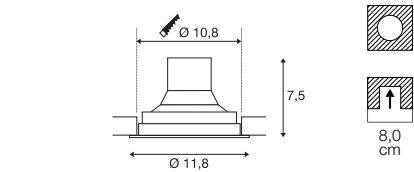

220-240V ~50/60Hz | 250mA
Systemleistung: 12W
Material: Aluminium

- Clipfedern
- Materialstärke Einbaufäche: 25 mm max.

		A → G
116310, 116311	700lm 3000K	A E

+	
<input type="checkbox"/> Linse 20°	
Art. Nr. 116302	
<input type="checkbox"/> Linse 40°	
Art. Nr. 116304	


Variante	Art. Nr.
700lm 3000K CRI80 60°	
■ schwarz	116310
700lm 3000K CRI80 60°	
□ weiß	116311

116310 382





116320 383

SUPROS 78
EL, Move, PHASE

220-240V ~50/60Hz | 250mA
Systemleistung: 12W
Material: Aluminium

- Clipfedern
- Materialstärke Einbaufäche: 25 mm max.



		A → G
116320, 116321	700lm 3000K	A E



☐ Linse 20°

Art. Nr. 116302

☐ Linse 40°

Art. Nr. 116304

Variante	Art. Nr.
700lm 3000K CRI80 60°	
■ schwarz	116320
700lm 3000K CRI80 60°	
□ weiß	116321