


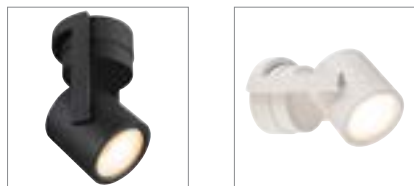







OCULUS  
CW, PHASE

220-240V ~50/60Hz | 250mA  
Systemleistung: 11W  
Material: Aluminium / Glas

- zusätzliche gefrostete Linse inklusive

KARPO 30  
CW, single

220-240V ~50/60Hz | 500mA  
Systemleistung: 9,3W  
Material: Aluminium / Stahl

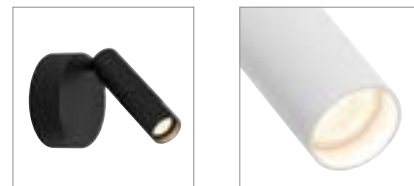KARPO 30  
CW, single, PHASE

220-240V ~50/60Hz | 500mA  
Systemleistung: 9W  
Material: Aluminium / Stahl



Variante	Art. Nr.
1004664, 1004665	36-780lm   2000-3000K   CRI90
■ schwarz	1004664
□ weiß	1004665



Variante	Art. Nr.
152330, 152331	560lm   680lm   3000K   CRI90
■ schwarz	152330
□ weiß	152331



Variante	Art. Nr.
1001495, 1001496	580lm   660lm   3000K   CRI90
■ schwarz	1001495
□ weiß	1001496

Variante	Art. Nr.
36-780lm   2000-3000K   CRI90	
■ schwarz	1004664
36-780lm   2000-3000K   CRI90	
□ weiß	1004665

Variante	Art. Nr.
560lm   3000K   CRI90	
■ schwarz	152330
680lm   3000K   CRI90	
□ weiß	152331

Variante	Art. Nr.
580lm   3000K   CRI90	
■ schwarz	1001495
660lm   3000K   CRI90	
□ weiß	1001496