

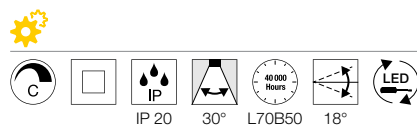


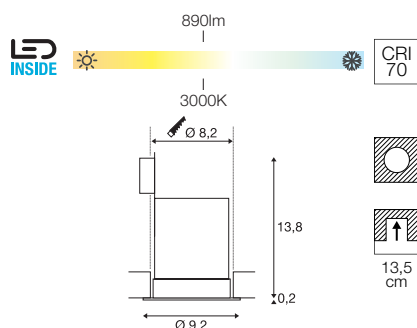

CONTONE® DL, rund, verstellbar, PHASE


CONTONE® DL, rund, starr, PHASE

161271 398

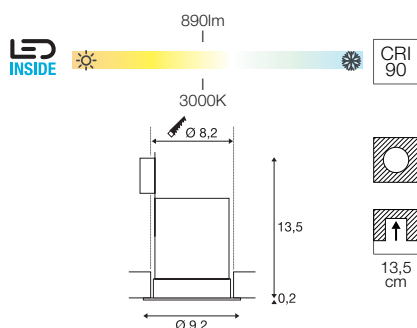

220-240V ~50/60Hz | 350mA
Systemleistung: 16W
Material: Aluminium

- Materialstärke Einbaufäche: 25 mm max.

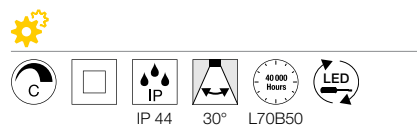

220-240V ~50/60Hz | 350mA
Systemleistung: 16W
Material: Aluminium

- Materialstärke Einbaufäche: 25 mm max.

161271	890lm 3000K	A → G F
--------	----------------	------------

Variante	Art. Nr.
890lm 3000K CRI90 □ weiß	161271

161291	890lm 3000K	A → G F
--------	----------------	------------

Variante	Art. Nr.
890lm 3000K CRI70 □ weiß	161291



161291 398