



240006 420






1002102 420



114431 421





PATTA-I EL, rund, PHASE



220-240V ~50/60Hz | 500mA
Systemleistung: 11W
Material: Aluminium / Glas

- Clipfedern
- Materialstärke Einbaufäche: 25 mm

PATTA-I EL, quadratisch, PHASE



220-240V ~50/60Hz | 500mA
Systemleistung: 11W
Material: Aluminium / Glas

- Clipfedern
- Materialstärke Einbaufäche: 25 mm



		A → G
114420, 114421, 114426	910lm 3000K	A E

Variante	Art. Nr.
910lm 3000K CRI80	
■ schwarz	114420
910lm 3000K CRI80	
□ weiß	114421
910lm 3000K CRI80	
■ gebürstet aluminium	114426





		A → G
114430, 114431, 114436	910lm 3000K	A E

Variante	Art. Nr.
910lm 3000K CRI80	
■ schwarz	114430
910lm 3000K CRI80	
□ weiß	114431
910lm 3000K CRI80	
■ gebürstet aluminium	114436





1002100 706

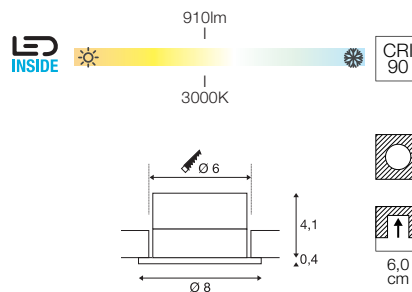PATTA-I
EL, rund, PHASE

220-240V ~50/60Hz | 500mA
Systemleistung: 11W
Material: Aluminium / Glas

- Materialstärke 20 mm max.

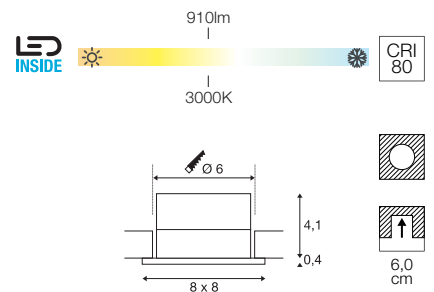PATTA-I
EL, quadratisch, PHASE

220-240V ~50/60Hz | 500mA
Systemleistung: 11W
Material: Aluminium / Glas

- Materialstärke 20 mm max.



		A → G
114420, 114421, 114426	910lm 3000K	A A G E

Variante	Art. Nr.
910lm 3000K CRI90	
■ schwarz	114420
910lm 3000K CRI80	
□ weiß	114421
910lm 3000K CRI80	
■ gebürstet aluminium	114426



		A → G
114430, 114431, 114436	910lm 3000K	A A G E

Variante	Art. Nr.
910lm 3000K CRI80	
■ schwarz	114430
910lm 3000K CRI80	
□ weiß	114431
910lm 3000K CRI80	
■ gebürstet aluminium	114436