







231305 577



232295 577

## IPERI 50 Pole

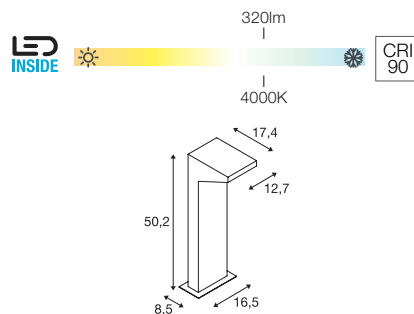

230V ~50Hz  
Systemleistung: 5W  
Material: Aluminium / Kunststoff




		A → G
231305	400lm 4000K	A → D



■ Erdspieß  
Art. Nr. 231231

Variante	Art. Nr.
320lm   4000K   CRI90 ■ anthrazit	231305

## QUADRASYL 75 Pole, TCR-TSE

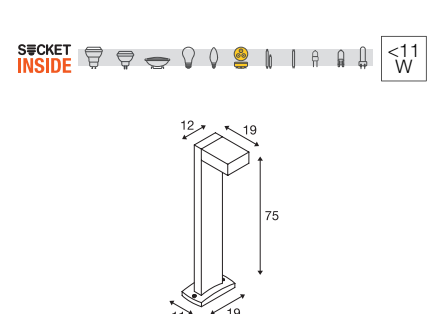

220-240V ~50/60Hz  
Material: Aluminium

- Betonanker inkl.
- Offenes Kabelende



GX53 <11W  
Ø: 7,5 cm L: 2,7 cm



LED GX53 | 6,1W | 120°  
4000K | 520lm | EEK=F  
6kWh/1000h

Art. Nr. 1005269



■ T-Verbindebox  
Art. Nr. 228726

Variante	Art. Nr.
1xGX53 ■ anthrazit	232295
1xGX53 ■ grau	232294

VERBINDUNGSBOX  
5-polig



220-240V ~50/60Hz  
L: 13 cm Ø: 3,2 cm  
Material: Polyamid (PA)

VERBINDUNGSBOX  
IP68, 3-polig



220-240V ~50/60Hz  
L: 11,5 cm Ø: 2,7 cm  
Material: Polyamid (PA)

T-VERBINDERBOX  
3-polig



220-240V ~50/60Hz  
L: 11 cm B: 6,4 cm H: 3 cm  
Material: Polyamid (PA)

Spannung max.	450V
Strombelastung max.	32A

Spannung max.	450V
Strombelastung max.	17,5A

Spannung max.	500V
Strombelastung max.	17,5A

Variante	Art. Nr.
■ schwarz	228725

Variante	Art. Nr.
■ schwarz	228730

Variante	Art. Nr.
■ schwarz	228726



1001823 527