







DASAR® PROJECTOR SP, 12/24V

DASAR® PROJECTOR SP, 230V



12-24V
Systemleistung: 6.5W
Material: Edelstahl 316 / Glas

- offenes Kabelende



220-240V ~50/60Hz | 400mA
Systemleistung: 4.6W
Material: Edelstahl 316 / Glas

- IP44 Schutzkontaktstecker



		A → G
233570	520lm 3000K	A ↑ G ↓ F



		A → G
233571	300lm 3000K	A ↑ G ↓ F




■ Erdspeiß Edelstahl 316	
Art. Nr. 233580	
■ Montageplatte Edelstahl316	
Art. Nr. 233582	
■ Erdspeiß Kunststoff	
Art. Nr. 900011	



■ Erdspeiß Edelstahl 316	
Art. Nr. 233580	
■ Montageplatte Edelstahl316	
Art. Nr. 233582	
■ Erdspeiß Kunststoff	
Art. Nr. 900011	

Variante	Art. Nr.
520lm 3000K CRI80 ■ edelstahl	233570

Variante	Art. Nr.
300lm 3000K CRI80 ■ edelstahl	233571

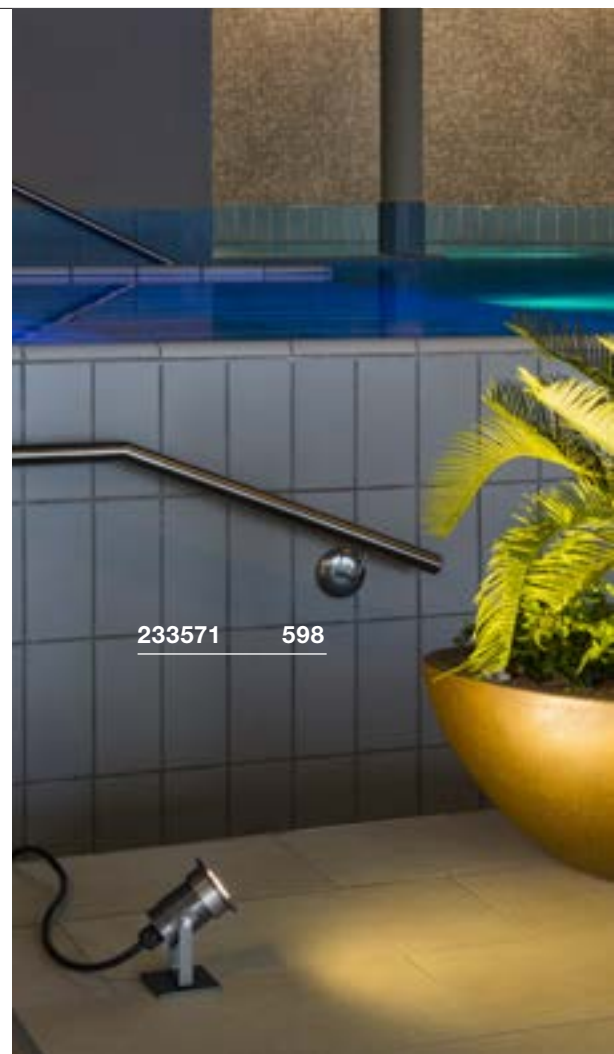

233571 598



233570 598